



CA04/00/446  
30 SEPTEMBER 2004 (30.09.04)

INVESTOR IN PEOPLE

CA04/1446

REC'D 03 NOV 2004
WIPO PCT


The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

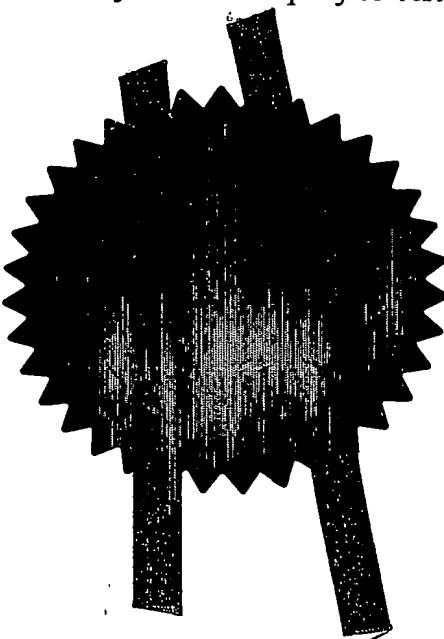

Signed

Dated 13 August 2004

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

1/77

The  
Patent  
Office

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

- 4 AUG 2003

LONDON

1. Your reference

50470/ NMW/P709710GB

2. Patent application number

(The Patent Office will fill in this part)

04 AUG 2003

0318220.1

3. Full name, address and postcode of the or of each applicant (underline all surnames)

AstenJohnson, Inc.  
4399 Corporate Road  
P.O. Box 118001  
Charleston  
South Carolina  
29423-8001  
United States of America

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

U.S.A., State to be advised.

7891369001  
DELAWARE (A/Ldld 9/9/03)

4. Title of the invention

TRIPLE LAYER INDUSTRIAL FABRIC FOR  
THROUGH-AIR DRYING PROCESS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

WITHERS & ROGERS  
Goldings House  
2 Hays Lane  
London  
SE1 2HW

Patents ADP number (if you know it)

1776001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

YES

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form 0  
Description 12  
Claim(s) 02  
Abstract 01  
Drawing (s) 07

*Handwritten marks: a squiggle and 'PM' with a dash.*

10. If you are also filing any of the following, state how many against each item.

Priority documents -  
Translations of priority documents -  
Statement of inventorship and right to grant of a patent (Patents Form 7/77) -  
Request for preliminary examination and search (Patents Form 9/77) YES  
Request for substantive examination (Patents Form 10/77) -  
Any other documents (please specify) -

11. I/We request the grant of a patent on the basis of this application.

Signature *Handwritten signature* Date 04.AUGUST.2003

12. Name and daytime telephone number of person to contact in the United Kingdom Nicholas M Wilson 01926 336111

# Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500 505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

# TRIPLE LAYER INDUSTRIAL FABRIC FOR THROUGH-AIR DRYING PROCESS

The present invention relates to industrial fabrics, more particularly to fabrics for use as through-air dryer fabrics to mold a web of cellulosic fibers into a three dimensional paper structure in a papermaking machine.

## Background of the invention

In the manufacture of paper, an aqueous slurry of about 99% by weight of water and 1% by weight of cellulosic fibers and other papermaking constituents is deposited from a headbox onto a moving forming fabric, or in between two moving forming fabrics on a two-fabric papermaking machine. The web is initially formed and partially drained in the forming section, and is transported downstream where it is consolidated and dried by known means, such as conventional press dewatering in the press section, and evaporative drying in the dryer section. However, if the finished sheet is intended to have liquid absorbency properties, for end uses such as for tissue or towel, improved results can be obtained through the use of a through-air drying (TAD) process instead of the conventional press and drying methods.

Water removal in a TAD process occurs as air is passed through the web and through the TAD fabric being used to support and convey the web through the TAD dryer section. This air movement molds the web to the surface topography of the TAD fabric, while removing most of the remaining moisture. The molding creates a more three dimensional web, thus increasing the thickness (known as bulk) of the finished web, which improves the efficacy of the finished product for applications such as tissue or towel. One means of imparting a desired topography to a TAD fabric is to apply a polymeric resin with precision in a desired pattern to

the paper contacting, or paper side (PS), surface of the fabric.

5 Polymeric resin coated fabrics are well known, and have been described for example in United States Patent No. 4,514, 345 to Johnson et al., and United States Patent Nos. 4,528,239, and 4,529,480 to Trokhan. Such resin coated structures generally comprise a reinforcing structure, referred to herein as a "carrier fabric", onto which a functional polymeric resin is deposited and subsequently pattern cured, for example by using  
10 a light source of activating wavelength through a mask. The resulting TAD fabric will generally have a macroscopically monoplanar patterned resinous network, either semicontinuous or discontinuous, on one surface.

15 The physical properties of the carrier fabric onto which the polymeric resin is to be deposited, and the balancing interaction between these properties, are critical to the effectiveness of the resultant TAD fabric. Some of the factors which affect the selection of these physical properties include  
20 the following:

Firstly, a high amount of projected open area, being the amount of open space per unit area projected through a fabric when viewed perpendicularly to the plane of the fabric, is required.  
25 Thus a woven carrier fabric must have a relatively open structure, in order to provide sufficient void volume for the polymeric resin in the finished TAD fabric, and to allow for the passage of sufficient air from the TAD dryer drum through the fabric and the web. If the carrier fabric is a closely woven  
30 structure, it will tend to become filled when the polymeric resin is applied, thus closing or unduly restricting the air passages.

Secondly, the carrier fabric must be dimensionally stable, and capable of resisting in-plane distortion such as is encountered when the fabric passes over bowed or spreader rolls in the papermaking machine. If the fabric does not have this stability, it may become narrowed or lengthened along its centre line, or suffer from creasing, or undulations across its width, any of which may impair its runnability and effectiveness. Such variations in the otherwise smooth planar nature of the fabric may cause localized variations in the paper product being conveyed by the fabric, which can lead to sheet breaks and a disruption in the operation of the papermaking machine.

Thirdly, the carrier fabric must be capable of being seamed effectively, preferably by a relatively narrow woven seam, which must be of sufficient strength to resist the longitudinal i.e. machine direction (MD) tensile forces to which the fabric is exposed. Typically, when a fabric such as this is prepared for a woven seam, the warp and weft yarns at the opposing fabric ends are unravelled and then rewoven into each other to form a seam region, usually having a width of between 5 and 12 inches. This woven seam must possess sufficient tensile strength so that the warp yarns resist sliding apart when the fabric and the seam are exposed to the expected MD tensile forces during use, which are typically up to 50 or 60 pounds per linear inch. One means of ensuring sufficient tensile strength at the woven seam is to impart sufficient crimp to the warp yarns during the fabric weaving, so that the yarns will have a greater resistance to sliding apart when the fabric is in use, and the seam will tend to have greater resistance to opening under longitudinal stress. If the crimp is insufficient for a given seam width, the warp yarns will tend to slide apart from the weft yarns, and the seam is more likely to fail. One means of ensuring that the warp

yarns are crimped sufficiently to resist seam failure is to weave the fabric according to a plain weave pattern, which maximizes the number of crimps per unit length of the warp yarn.

5     Designers of carrier fabrics such as those of the prior art have  
been faced with the difficulty of meeting and reconciling these  
and other criteria. In particular, for an effective TAD fabric,  
it is necessary to provide a weave structure which has a high  
open area, while at the same time is woven to a pattern which  
10     provides sufficient yarn crimp to provide stability in each  
dimension, and to provide a durable seam.

Single layer TAD fabrics are well known and have been described  
in United States Patent Nos. 5,839,479 and 5,853,547 to Wright  
15     et al. These patents teach that sheet bulk is enhanced by the  
use of cross direction (CD) yarns of alternating large and small  
diameters, the weave pattern in each case resulting in paper  
bulking depressions on the PS surface.

20     Double or multilayer fabrics have also been developed for use as  
TAD fabrics. For example, United States Patent Nos. 5,496,624  
and 5,840,411 to Stelljes each describe a double layer fabric  
which can be subjected to resin coating by means of a resinous  
pattern layer cast over the PS surface.

25     It has further been found that sheet bulk can be enhanced by the  
use of multilayer fabrics including vertically stacked yarns.  
For example in PCT Publication No. WO 03/006732 to Johnson et  
al., two sets of weft yarns are substantially vertically  
aligned, to urge the warp yarns into greater prominence on the  
30     PS surface; and alternatively, two sets of warp yarns can also  
be vertically stacked.

It is known to use pairs of either or both warp and weft yarns to bind together the layers of double or multilayer forming fabrics. For example, United States Patent No. 5,826,627 to Seabrook et al. discloses a forming fabric including pairs of  
5 intrinsic weft binder yarns, which are weft yarns that contribute to the structure of both the PS and MS fabric surfaces, and also serve to bind these fabric layers together. However, other "regular" weft yarns are interspaced with the intrinsic weft binder yarns of this patent.

10 Further, Application No. PCT/EP01/09398 to Odenthal shows a composite forming fabric comprising a PS layer having a plain weave pattern, formed of intrinsic weft pairs, one member of each pair also serving to bind together the PS and MS layers.  
15 However, in each pair the other member does not serve to bind the two layers together, and the long MS warp floats would contra-indicate use of this fabric as a TAD carrier fabric.

20 It has been found that an effective TAD carrier fabric can be successfully manufactured using a weave pattern in which all the weft yarns are arranged as pairs of intrinsic binder yarns, and are woven so as to bind together the warp yarns of each of the PS and MS layer, which are arranged in vertically stacked pairs.  
25 By the selection of an appropriate weave pattern, a high open area can be provided, enabling effective resin coating, and at the same time providing a dimensionally stable fabric having sufficient crimp in the warp yarns to allow for durable seaming.

#### **Summary of the Invention**

30 The present invention therefore seeks to provide a triple layer woven industrial fabric having a paper side (PS) layer and a machine side (MS) layer comprising polymeric warp and weft yarns



woven to a repeat pattern wherein:

(i) all of the warp yarns are arranged as vertically stacked pairs;

5 (ii) all of the weft yarns comprise pairs of intrinsic weft binder yarns each having a first and second member each of which contributes to the structure of both the PS and the MS layers of the fabric and binds together the PS and MS layers; and

10 (iii) for each pair of intrinsic weft binder yarns, when either the first or second member passes from the PS layer to the MS layer, the other member of the pair passes from the MS layer to the PS layer at an exchange point located between at least one common pair of warp yarns.

15 The present invention further seeks to provide a woven triple layer industrial fabric which is suitable for resin coating for use as a through-air dryer fabric for a papermaking machine.

20 The fabrics of the present invention are unique in that the warp yarns are vertically stacked and paired, and are interwoven with pairs of intrinsic weft binder yarns so as to provide a triple layer fabric structure. The combination of stacked warp yarns and pairs of intrinsic weft binder yarns allows the fabrics of this invention to be woven so as to provide a high projected open area while, at the same time, providing adequate  
25 dimensional stability, stretch resistance and seam strength.

30 In particular, in a preferred embodiment, each of the MS and PS layers are woven according to the same weave pattern, which is preferably a plain weave. The fabric is woven so as to have a projected open area of at least 35%, and an air permeability of at least 850 cubic feet per minute (cfm). The high open area facilitates the retention and adhesion of a polymeric coating of

the fabric which may be arranged according to a desired pattern, while ensuring that, after coating, sufficient air movement is allowed through the fabric. The use of intrinsic weft binder yarn pairs in combination with the stacked warp yarn arrangement provides the fabric with enhanced dimensional stability, to resist distortion. The use of a plain weave pattern for both the MS and the PS layers imparts sufficient crimp to the warp yarns such that the seams are able to withstand greater amounts of longitudinal tension than comparable seams formed in fabrics using other weave patterns. Further, the weave pattern is selected to maximize the number of yarn knuckles on the PS surface of the PS layer, which is the surface to receive the resin coating. This serves to improve the attachment of resin coating to the fabric by providing a large number of surface features which can be encapsulated by the resin.

#### **Detailed description**

In the context of this invention, the following terms have the following meanings:

"Intrinsic weft binder yarns" are weft yarns which contribute to the structure of the PS surface of the PS layer, and to the structure of the MS surface of the MS layer, and also serve to bind the PS and the MS layers together; and

"Projected open area" is the amount of open space per unit area projected through a fabric when viewed perpendicularly to the plane of the fabric.

In the fabrics of this invention, all the weft yarns are woven as intrinsic weft binder yarns.

The invention will now be described by way of reference to the Figures, in which  
Figures 1A to 1D show the paths in the CD of four successive

weft yarn pairs of a  
first embodiment of the invention;

Figure 2 shows the path in the MD of one stacked pair of warp  
yarns of the embodiment of Figure 1;

5 Figure 3 is a weave diagram showing one repeat of the weave  
pattern of the embodiment of Figure 1;

Figures 4A to 4C show respectively the paths of one weft yarn  
pair of a second, third and fourth embodiment of the invention;

10 Figure 5 is a photographic cross-sectional view showing the  
paths of the weft yarns in the CD of the embodiment of Figure 1;

Figure 6 is a photographic cross-sectional view showing the  
paths of the warp yarns in the MD of the embodiment of Figure 1;  
and

15 Figure 7 is a photographic isometric view of the embodiment of  
Figure 1.

Referring to Figures 1A to 1D, the paths in the CD of four  
successive pairs of weft yarns 100 are shown. For each pair, a  
20 first member is shown by a solid line and ascribed an even  
number 30, 32, 34, and 36, and the second member is shown by a  
broken line and ascribed an odd number 31, 33, 35 and 37. These  
numbers correspond with the weft yarn numbering indicated at the  
left side of the weave diagram of Figure 3.

25 In the PS layer, a first set of warp yarns 110, shown as the odd  
numbered yarns forming the upper layer in Figures 1A to 1D, is  
vertically aligned with a second set of warp yarns 120, shown as  
the even numbered yarns forming the lower layer in Figures 1A to  
1D, to form vertically stacked pairs. These numbers correspond  
30 with the warp yarn numbering indicated across the top of the  
weave diagram of Figure 3.

Referring also to Figure 7, it can be seen that the fabric of this embodiment is woven to a plain weave design in each of the PS layer 70 and the MS layer 80, to which each member of each pair of weft yarns 100 contributes. In each embodiment, the paths of each member of each pair of weft yarns 100 in each repeat comprise two portions, so that each member alternates between the PS layer 70 and the MS layer 80, and so that between the first and second portions of the repeat, the first and second members of the pair of weft yarns 100 exchange positions at an exchange point 90. In the first portion, the first member is exposed over a preselected number N1 of PS warp yarns 110, while the second member is exposed over a preselected number N2 of MS warp yarns 120. In the second portion, after the exchange of the two members of the pair of weft yarns 100, the first member is exposed over a preselected number M1 of MS warp yarns 120 while the second member is exposed over a preselected number M2 of PS warp yarns 110.

In the first embodiment, as can be seen for example in relation to first and second members 30 and 31 respectively in Figures 1A and 5, the two members of each pair of weft yarns 100 follow an identical path, the path of the second member 31 being displaced by one-half of a pattern repeat from the first member 30. In this embodiment, the first member 30 in a first portion of the repeat pattern is exposed over two PS warp yarns 1 and 5, and then switches to the MS layer, passing under PS warp yarn 7 and over MS warp yarn 8, whence it follows a second portion of the repeat pattern, being exposed over two MS warp yarns 10 and 14. At the same time, the second member 31 in a first portion of the repeat pattern is exposed over two MS warp yarns 2 and 6, and then switches to the PS layer, also passing under PS warp yarn 7 and over MS warp yarn 8, whence it follows a second portion of

the repeat pattern, being exposed over two PS warp yarns 9 and 13. A second exchange point 90 occurs between PS warp yarn 15 and MS warp yarn 16. Thus it can be seen that the two members 30 and 31 exchange positions at an exchange point 90 between the vertically stacked pair of warp yarns 7 and 8. Similarly, with reference to Figures 1B, 1C and 1D, each pair of weft yarns follows the same path, displaced by an appropriate number of PS and MS warp yarns, 110 and 120. It can be seen that for this embodiment,  $N1 = N2 = M1 = M2 = 2$ .

Referring to Figures 2 and 6, the warp path in the MD of the first stacked pair of warp yarns 110 and 120 is shown, the PS warp yarn being shown as yarn 1 and the MS yarn being shown as yarn 2. These yarns, and the weft yarns 100, are identified to correspond with the numbering in the weave diagram of Figure 3.

Referring to Figure 3, some examples of the exchange points 90 are indicated. These occur, for example, for weft yarns 30 and 31, between warp yarns 7 and 8, and 15 and 16. Similarly, exchange points for weft yarns 32 and 33 occur between warp yarns 5 and 6, and 13 and 14; and for weft yarns 34 and 35 between warp yarns 3 and 4, and 11 and 12.

Referring to Figures 4A, 4B and 4C, three further embodiments of a fabric according to the invention are shown. In Figure 4A, each member of the weft pair, identified as 50A and 51A, follows an identical path, displaced by one-half of the repeat, and the two members exchange positions in the PS layer 70 and the MS layer 80 at exchange points 90. However, in the PS surface of the PS layer 70, the weave pattern is a 3/1 broken twill, whereas the weave pattern for the MS surface of the MS layer 80 remains a plain weave. In this embodiment,  $N1 = M2 = 3$ , and  $N2$

= M1 = 2.

Similarly, in Figure 4B, each member of the weft pair, identified as 50B and 51B, follows an identical path, displaced by one-half of the repeat, and the two members exchange positions in the PS layer 70 and the MS layer 80 at exchange points 90. However, in both the PS surface of the PS layer 70 and the MS surface of the MS layer 80, the weave pattern is a 2/1 twill. In this embodiment,  $N1 = N2 = M1 = M2 = 2$ .

Figure 4C shows an embodiment similar to that shown in Figure 4B. However, the weave pattern in both the PS surface of the PS layer 70 and the MS surface of the MS layer 80 is a 2/2 basket weave, and the exchange points occur between two adjacent pairs of stacked warp PS yarns 110 and MS yarns 120. Thus, the first exchange point 90 for weft yarns 50C and 51C in Figure 4C occurs below both PS warp yarns 5 and 7 and above both MS warp yarns 6 and 8.

As noted above, the fabrics of this invention have a high projected open area, which after heatsetting is at least 35%, and is preferably between 35% and 50%. These values are necessary to allow sufficient passage of air from the TAD drum through the sheet, particularly where a patterned resin coating is applied to the fabrics. Further, the fabrics of this invention have an air permeability, after heatsetting, within the range of 800 to 1200 cubic feet per minute per square foot. More preferably, the fabrics of the invention have an air permeability in the range of 900 to 110 cubic feet per minute per square foot.

It has been found that the preferable mesh ranges for the fabrics of this invention are between 35 x 2 (warp) by 25 x 2 (weft) and

50 x 2 (warp) by 40 x 2 (weft) per inch, so that the mesh ranges, without regard to the stacking of the warp yarns 110 and 120 and the paired weft yarns 100, are between 70 to 100 for the warp and 50 to 80 for the weft. Taking into account the stacking of the warp yarns and the pairing of the weft yarns as intrinsic weft binder yarns, the effective mesh ranges of the fabric are from 35 - 50 warp/in. and 25 - 40 weft/in. The effective mesh is that which is seen when determining projected open area.

When used as carrier fabrics for a TAD process, the yarns used for both the warps and the wefts in the fabrics of the invention must be resistant to both heat and hydrolytic degradation. Suitable materials both for the warp yarns 110 and 120 and for the weft yarns 100 include polyetheretherketone, polyphenylene sulphide, polyethylene terephthalate, and polycyclohexamethalyne terephthalate, acid modified. The materials used for the MS warps can be different from the materials used for the PS warps or for the wefts. Other polymeric materials such as are commonly used for industrial fabrics, may be appropriate in applications other than for a TAD process.

It has been found that suitable yarn sizes for the fabrics of the invention are a minimum of 0.18mm for the weft yarns 100, and a minimum of 0.20mm for the warp yarns 110 and 120. However, other yarn sizes may be selected depending on the intended use for the fabric.

We Claim:

1. A triple layer industrial fabric having a paper side (PS) layer and a machine side (MS) layer comprising polymeric warp and weft yarns woven to a repeat pattern wherein:

(i) all of the warp yarns are arranged as vertically stacked pairs;

(ii) all of the weft yarns comprise pairs of intrinsic weft binder yarns each having a first and second member each of which contributes to the structure of both the PS and the MS layers of the fabric and binds together the PS and MS layers; and

(iii) for each pair of intrinsic weft binder yarns, when either the first or second member passes from the PS layer to the MS layer, the other member of the pair passes from the MS layer to the PS layer at an exchange point located between at least one common pair of warp yarns.

2. A triple layer industrial fabric as claimed in Claim 1, wherein the PS layer has an exposed PS surface and the MS layer has an exposed MS surface; and wherein

(i) in a first portion of the repeat pattern, the first member is exposed in the PS surface over a preselected number (N1) of PS warp yarns while the second member is exposed in the MS surface over a preselected number (N2) of MS warp yarns; and

(ii) in a second portion of the repeat pattern the first member is exposed in the MS surface over a preselected number (M1) of MS warp yarns while the second member is exposed in the PS surface over a preselected number (M2) of PS warp yarns.





3. A triple layer industrial fabric as claimed in claim 2, wherein the value of N1 is equal to the value of N2, and the value of M1 is equal to the value of M2.




4. A triple layer industrial fabric as claimed in claim 2, wherein the value of N1 is equal to the value of M2, and the value of N2 is equal to the value of M1.
- 5 5. A triple layer industrial fabric as claimed in claim 2, wherein the values of each of N1, N2, M1 and M2 are equal.
- 10 6. A triple layer industrial fabric as claimed in claim 1 wherein for each unit area, viewed substantially perpendicularly to the PS surface of the PS layer or the MS surface of the MS layer, an open space projected through the fabric after a heatsetting process has an area in a range of 35% to 50% of the unit area.
- 15 7. A triple layer industrial fabric as claimed in claim 1 wherein the fabric after a heatsetting process has an air permeability in a range of 800 to 1200 cubic feet per minute per square foot.
- 20 8. A triple layer industrial fabric as claimed in claim 7 wherein the fabric after a heatsetting process has an air permeability in a range of 900 to 1100 cubic feet per minute.
- 25 9. A triple layer industrial fabric as claimed in claim 1 wherein the polymeric yarns are made from at least one material selected from the group polyetheretherketone, polyphenylene sulphide, polyethylene terephthalate, and polycyclohexamethalyne terephthalate, acid modified.
- 30 10. A triple layer industrial fabric as claimed in claim 1 wherein the PS surface of the PS layer of the fabric has a polymeric resinous coating.

### Abstract

5 A triple layer woven industrial fabric, particularly suitable  
for through-air drying applications, has a paper side (PS)  
layer and a machine side (MS) layer of polymeric warp and weft  
yarns woven to a repeat pattern wherein all the warp yarns are  
10 arranged as vertically stacked pairs, all the weft yarns  
comprise pairs of intrinsic weft binder yarns, and for each  
pair of weft yarns, when either the first or second member of  
the pair passes from the PS layer to the MS layer, the other  
member of the pair passes from the MS layer to the PS layer at  
15 an exchange point located between at least one common pair of  
warp yarns.

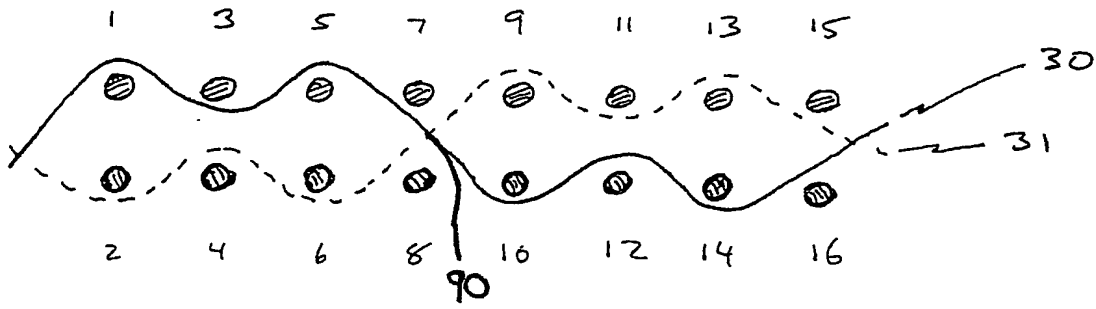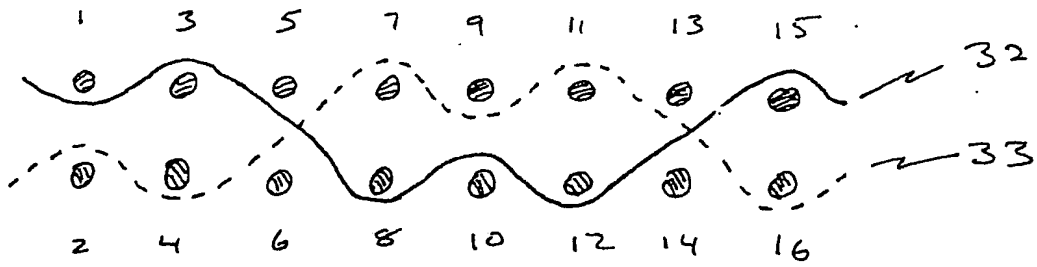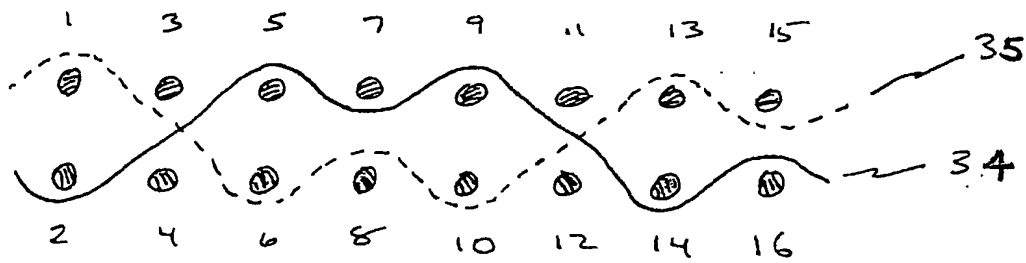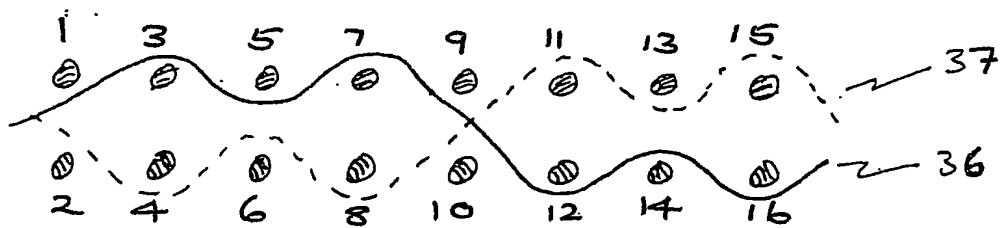FIG.FIG. 1FIG. 1FIG. 1

← CD →

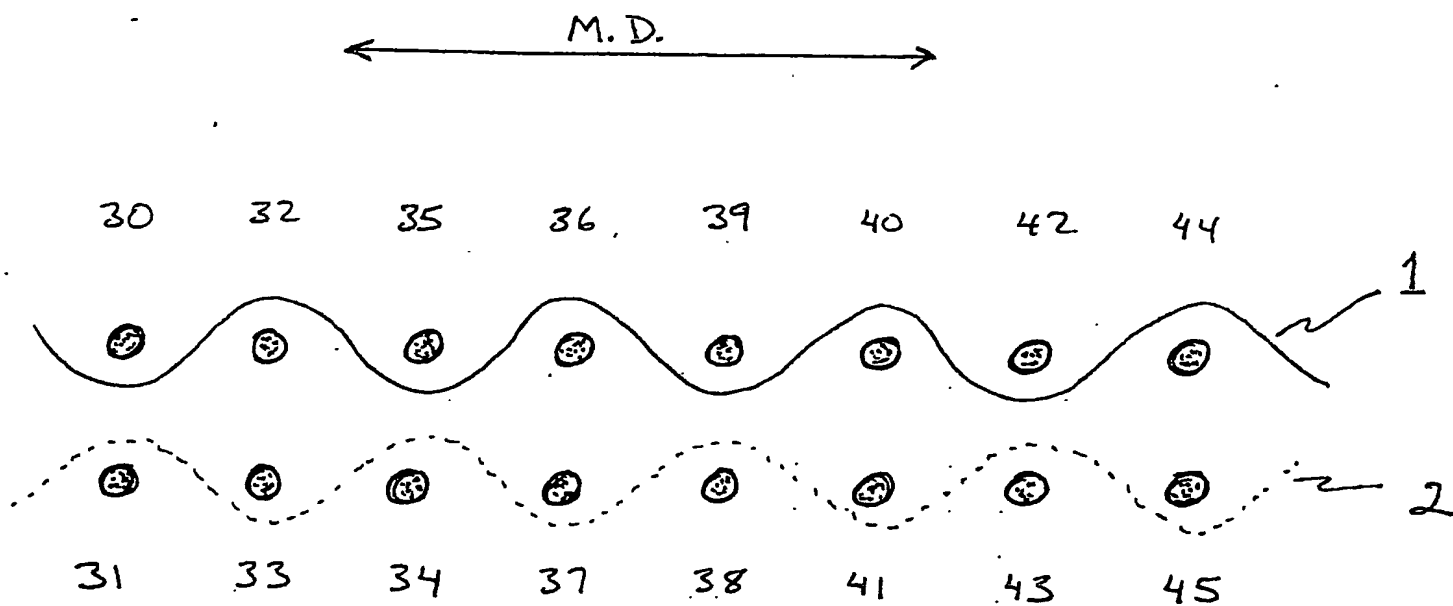FIG. 2

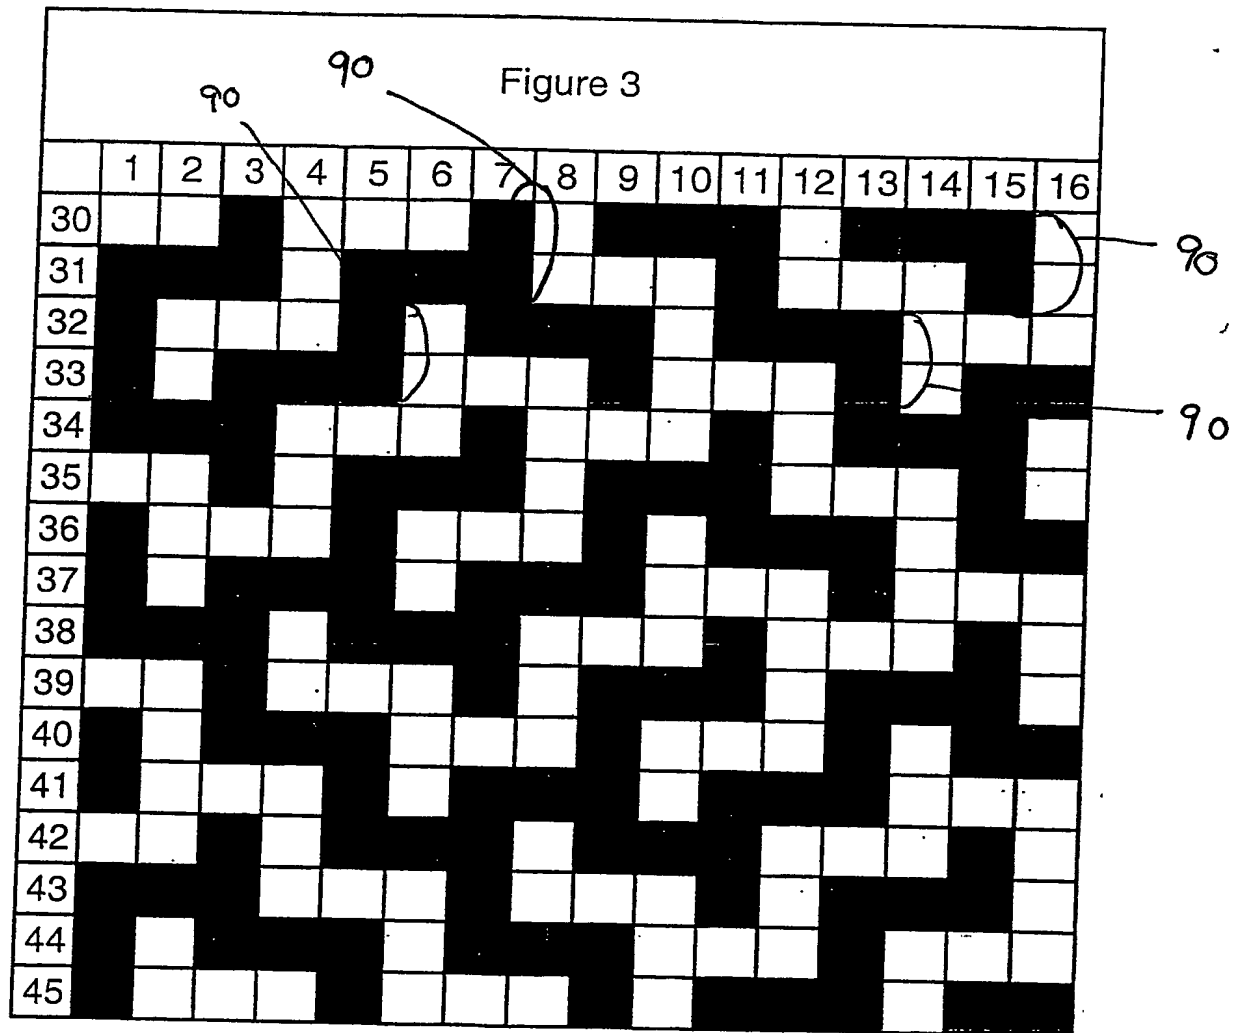


FIG. 4A

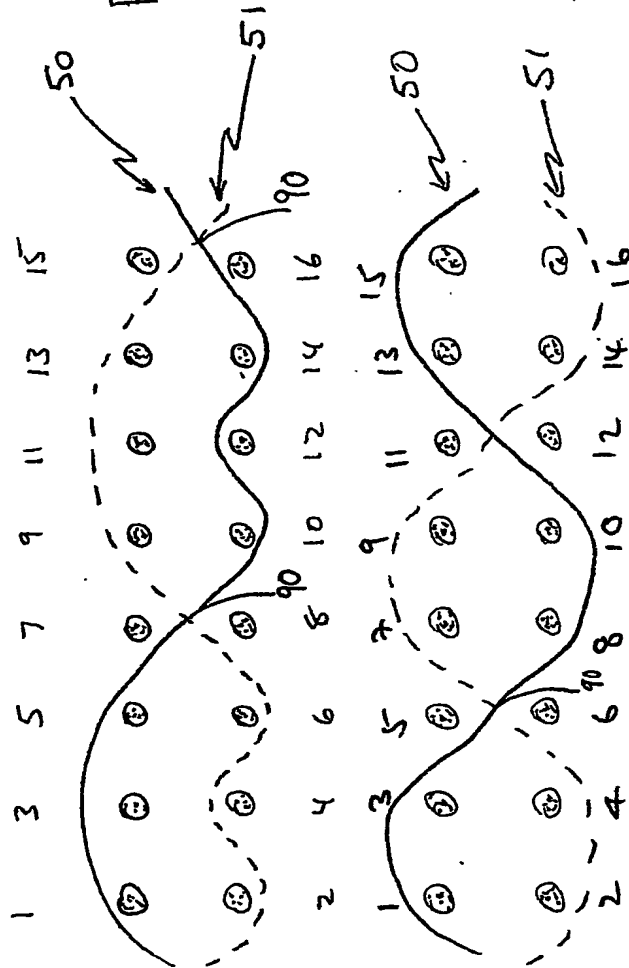


FIG. 4B

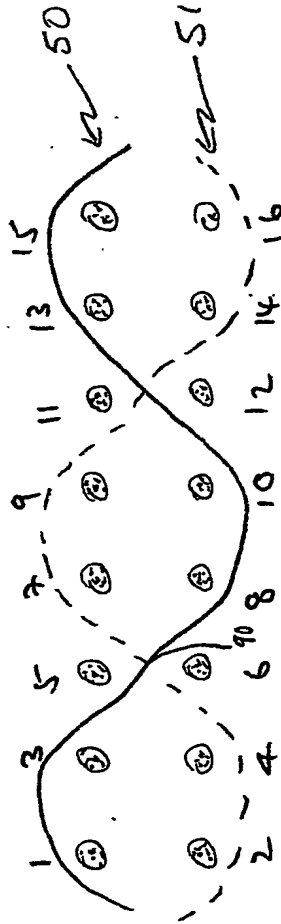
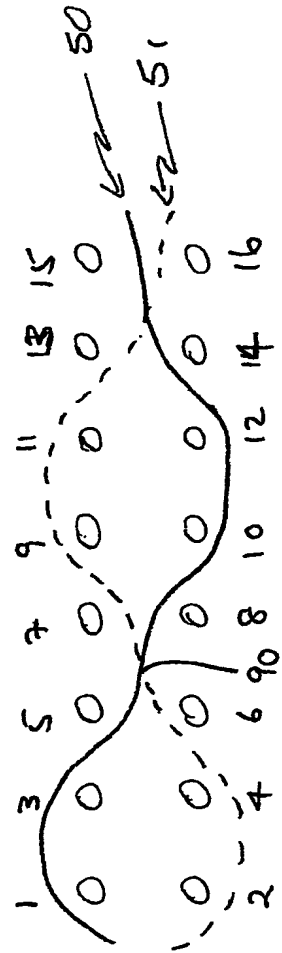
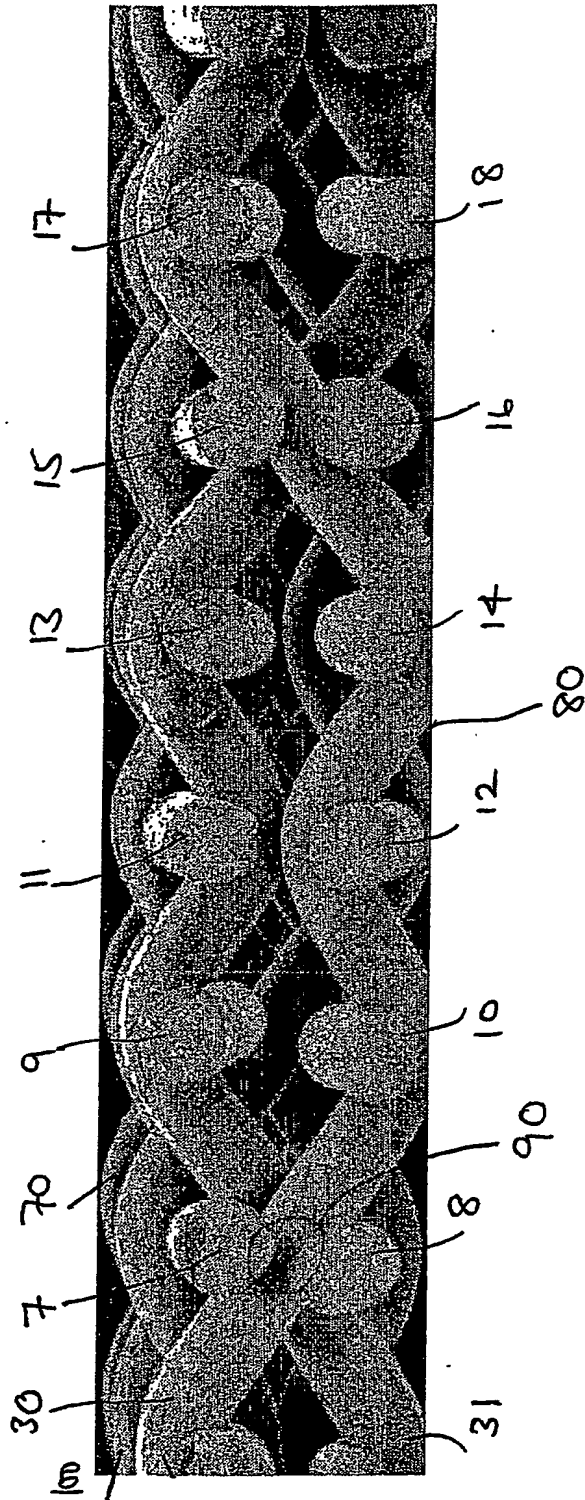


FIG. 4C





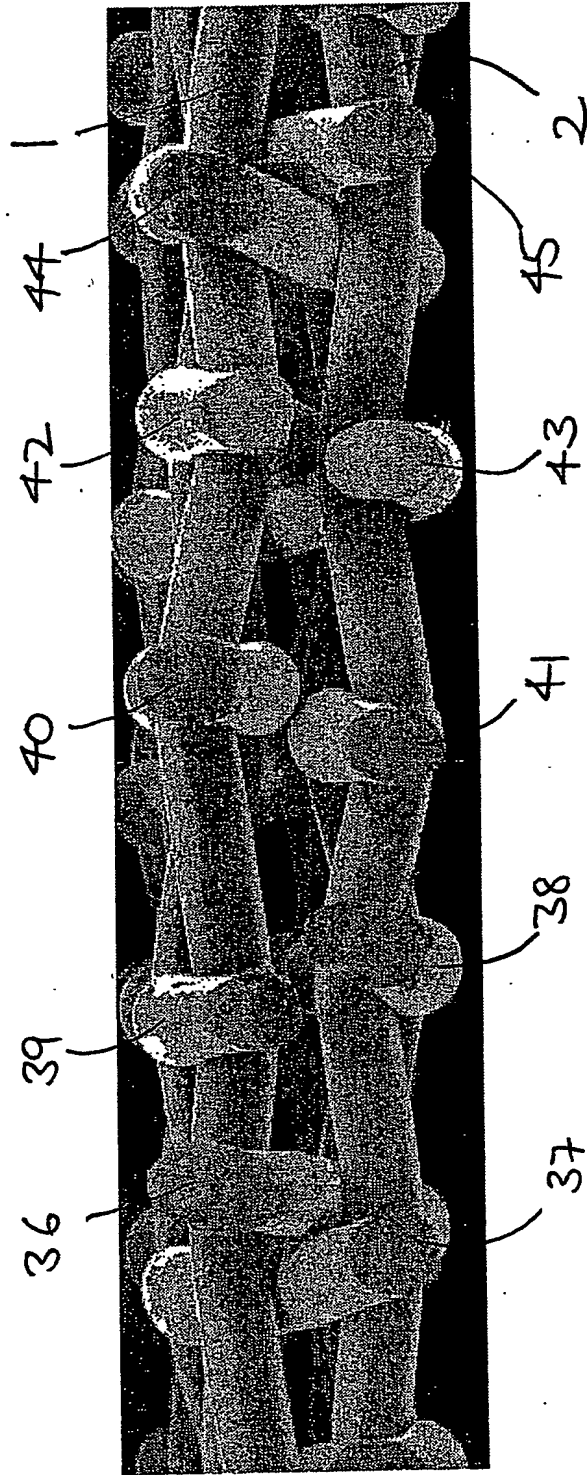


Fig. 6



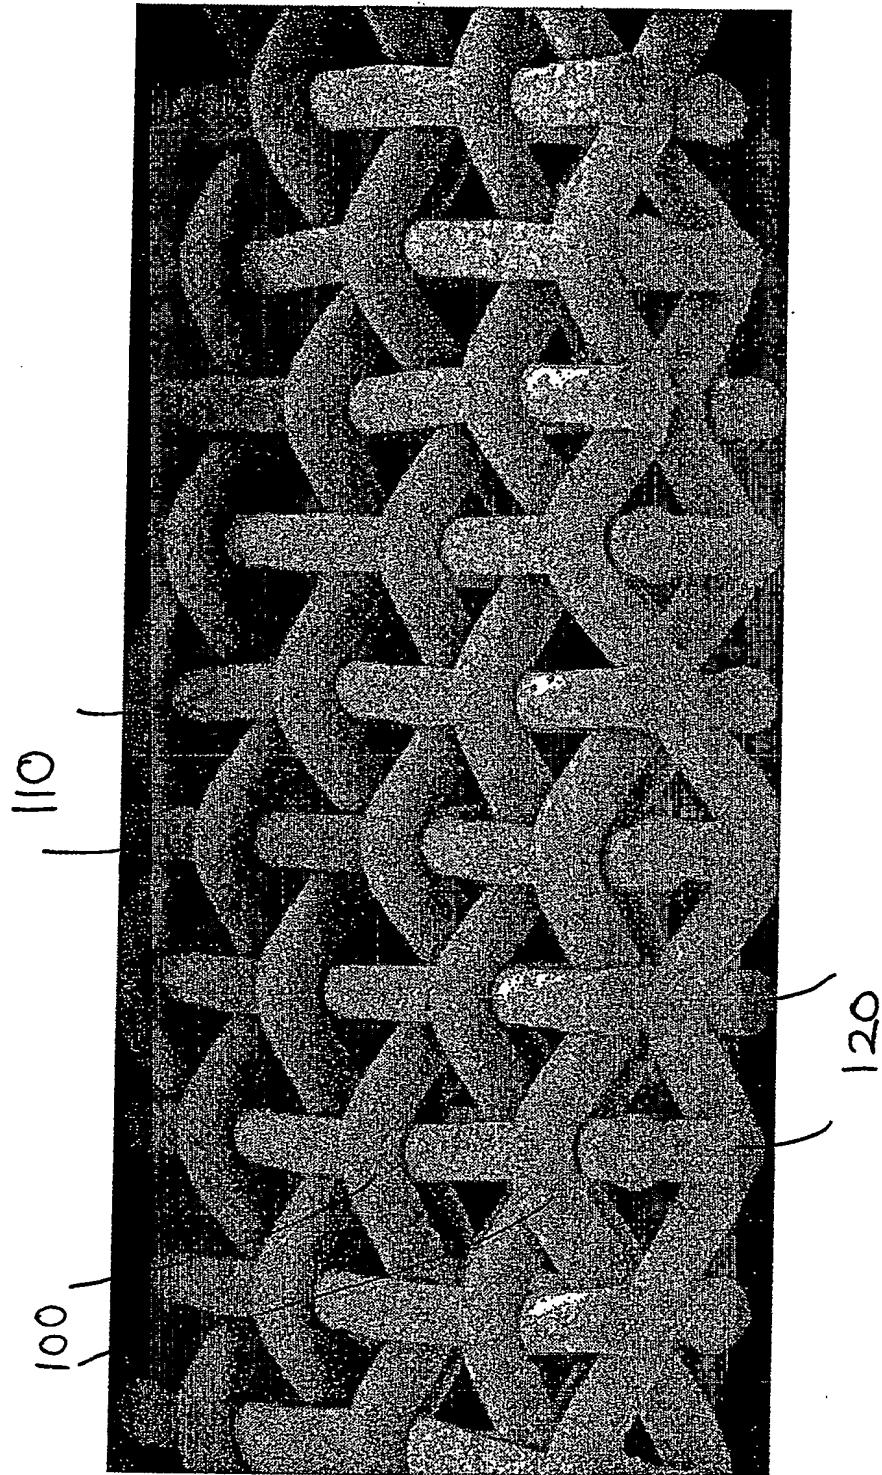


Fig. 7